

# *Mobile Communications*

## **Ad-hoc and Mesh Networks**

*Manuel P. Ricardo*

*Faculdade de Engenharia da Universidade do Porto*

- ◆ *What is an ad-hoc network?*
- ◆ *What are differences between layer 2 and layer 3 ad-hoc networks?*
- ◆ *What are the differences between an IEEE mesh network and an IETF MANET network?*
- ◆ *What are the differences between a mobile network and a mobile terminal?*
- ◆ *How to support a moving network?*

- ◆ MANET – Ad-hoc Networks
  - » AODV, OLSR
  
- ◆ Mesh networks
  - » 802.11s
  
- ◆ Mobile Networks
  - » IETF NEMO
  - » MANET support for mobile networks


## *Basics on ad-hoc networks*

- ◆ *What is an ad-hoc network?*
- ◆ *What are the differences between an ad-hoc wireless network and a wired network?*
- ◆ *What are the characteristics of the most important ad-hoc routing protocols?*

## *Ad-Hoc Network (Layer 3)*


---

- ◆ Auto-configurable network
- ◆ Working over wireless links
- ◆ Nodes are mobile → dynamic network topology
- ◆ Isolated network, or interconnected to Internet
- ◆ Nodes forward traffic
- ◆ Routing protocol is required

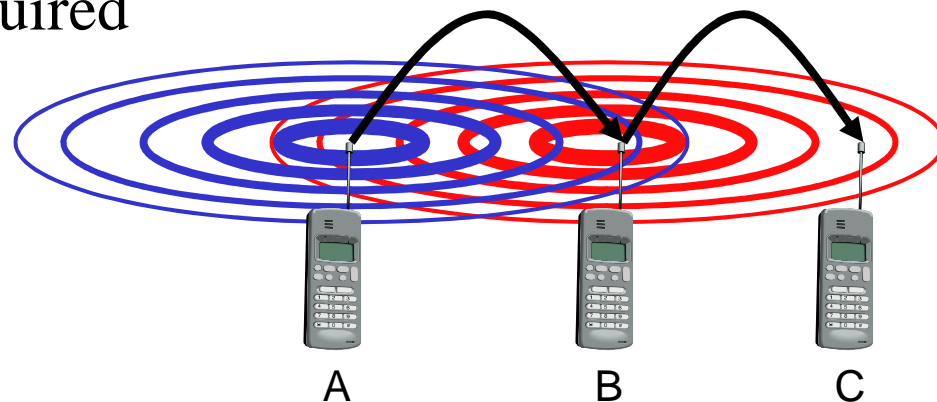

# *IETF MANET - Mobile Ad-hoc Networking*

---

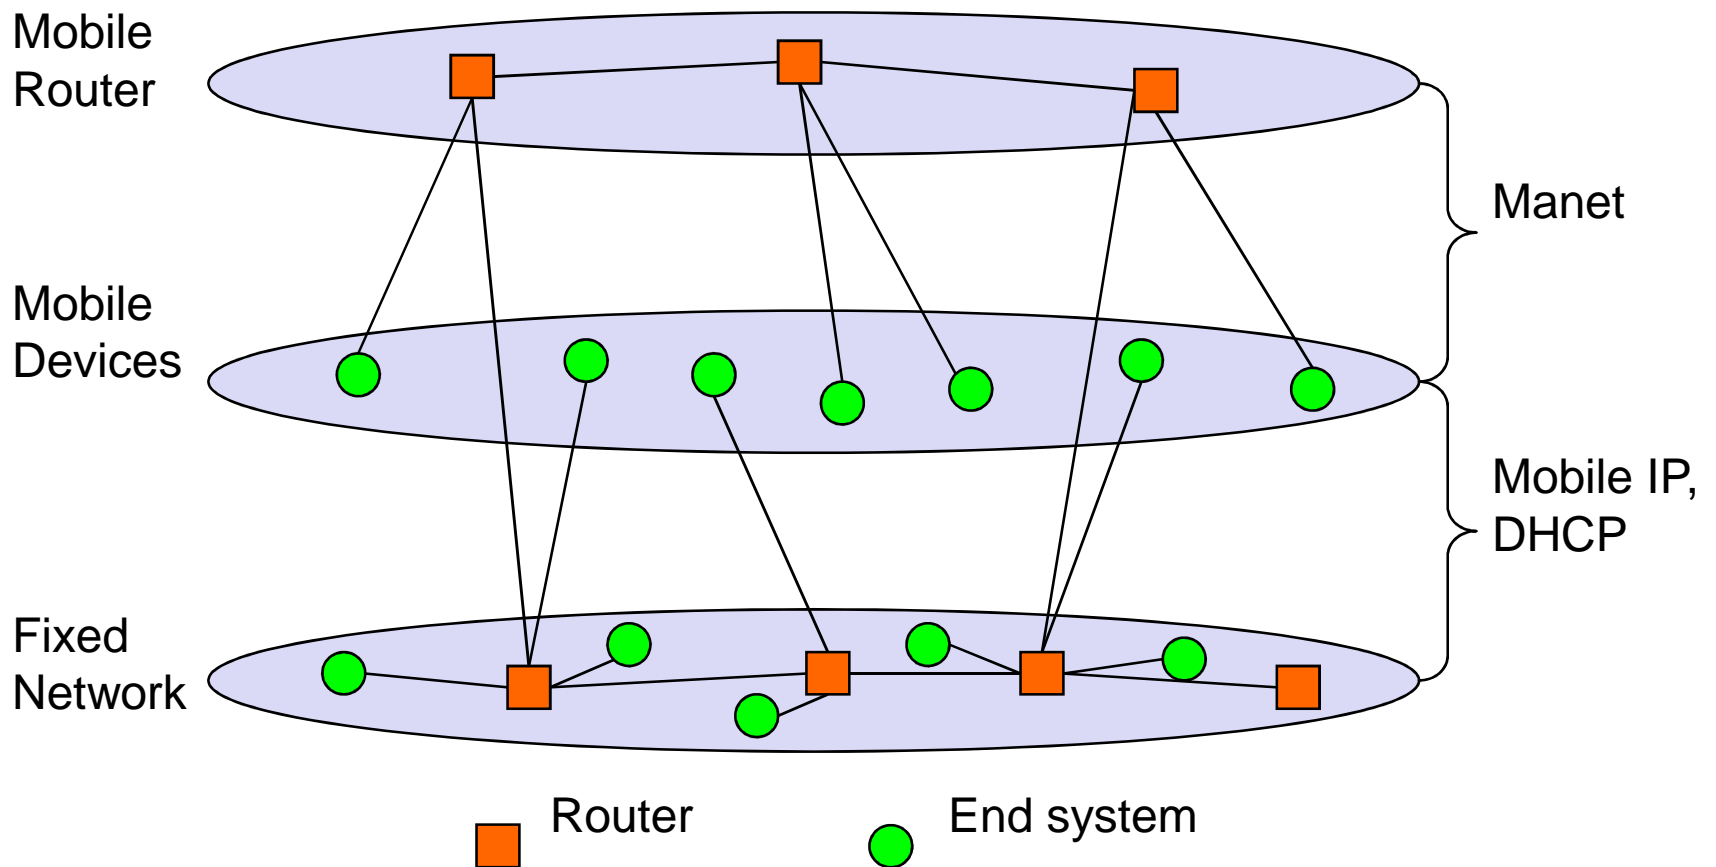


## *Route calculation in wired networks*

---

### ◆ Distance vector

- » Messages exchanged periodically with neighbours
- » Message indicates reachable nodes and their distance
- » Algorithm takes long time to converge
- » Eg. RIP

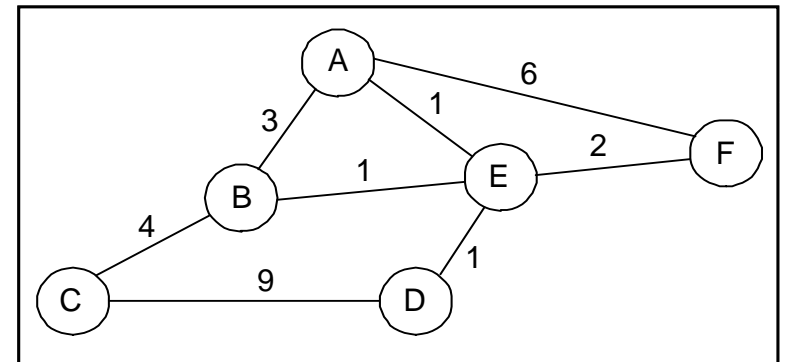


### ◆ Link state

- » Router informs periodically the other routers about its links state
- » Every router gets information from all other routers
- » Lots of traffic
- » Eg. OSPF

# Route calculation in Ad-Hoc Networks- Characteristics

---

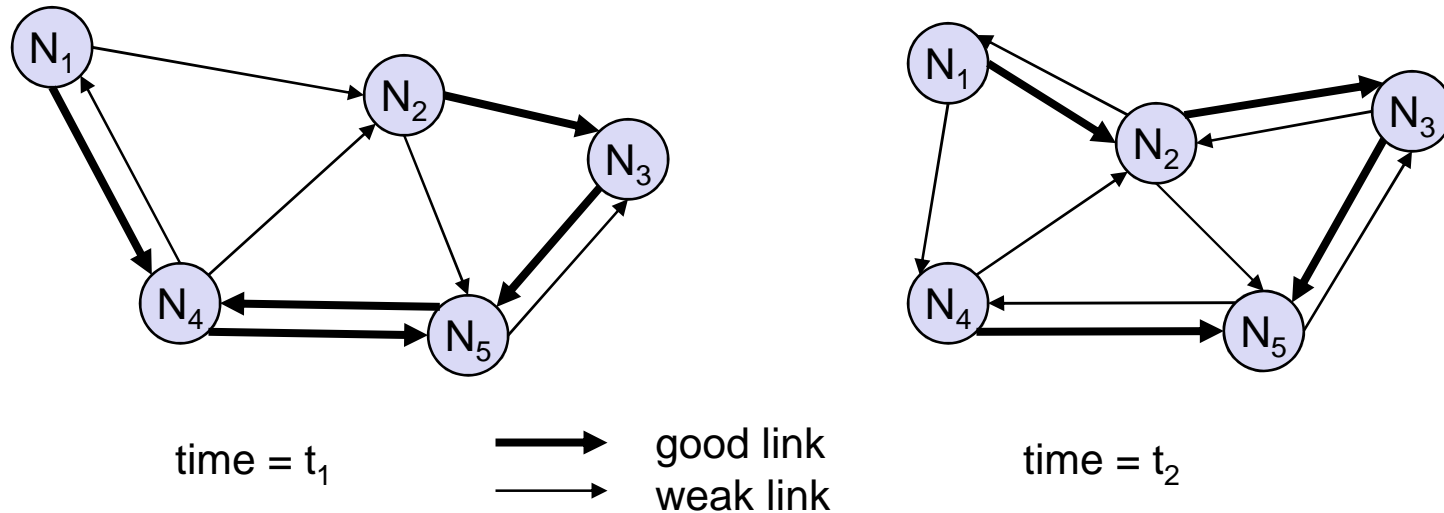

## Ad-hoc network

- » Dynamic topology
  - Depends on node mobility
- » Interference
  - Radio communications
- » Asymmetric links
  - Received powers and attenuation unequal in the two directions



## *Routing in Ad-hoc Networks*

---

- ◆ Conventional routing protocols
  - Built for wired networks → whose topology varies slowly
  - Assume symmetric links
- ◆ In Ad-hoc networks
  - » Dynamic topology → information required to be refreshed more frequently
    - energy consumption
    - radio resources used for signaling information
  - » Wireless node may have scarce resources (bandwidth, energy) ...
- ◆ New routing strategies / protocols for ad-hoc networks
  - 2 type : reactive e pro-active

## *To think about*

---

- ◆ How can we avoid a large signaling overhead (number of routing messages) in ad-hoc networks

## *AODV – A needs to send packet to B*

---




B




A

## *AODV – A sends RouteRequest*

---

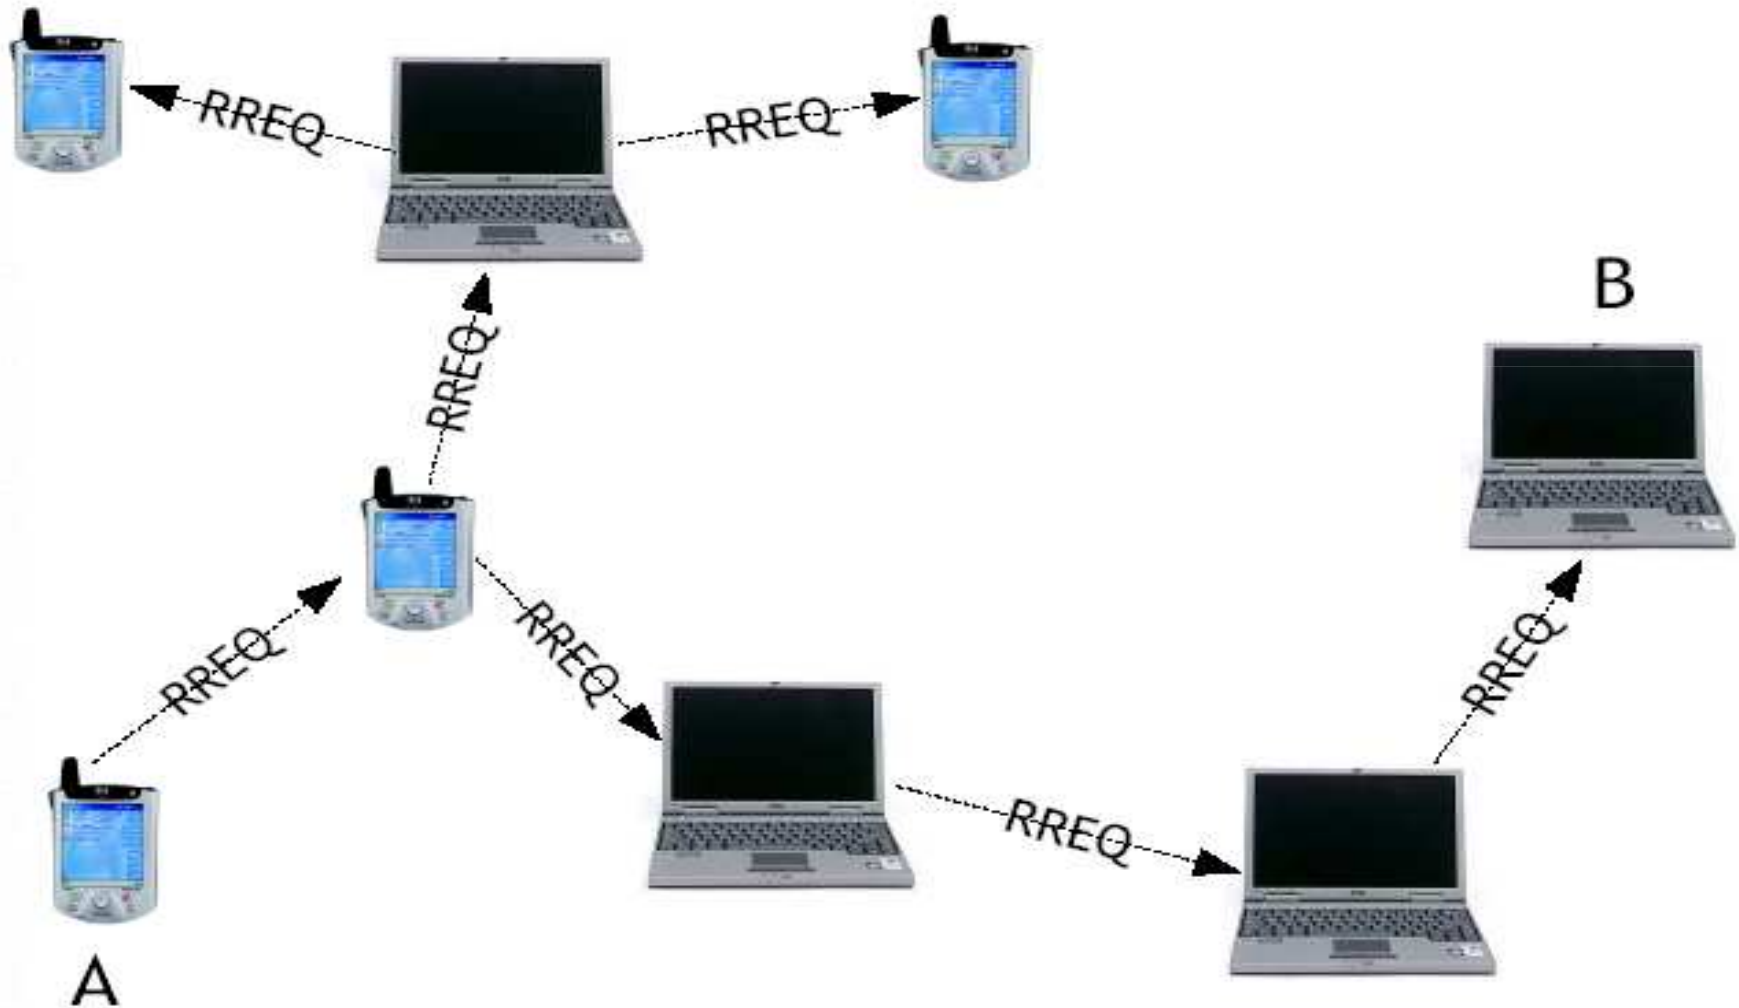

## *AODV – B replies with RouteReply*

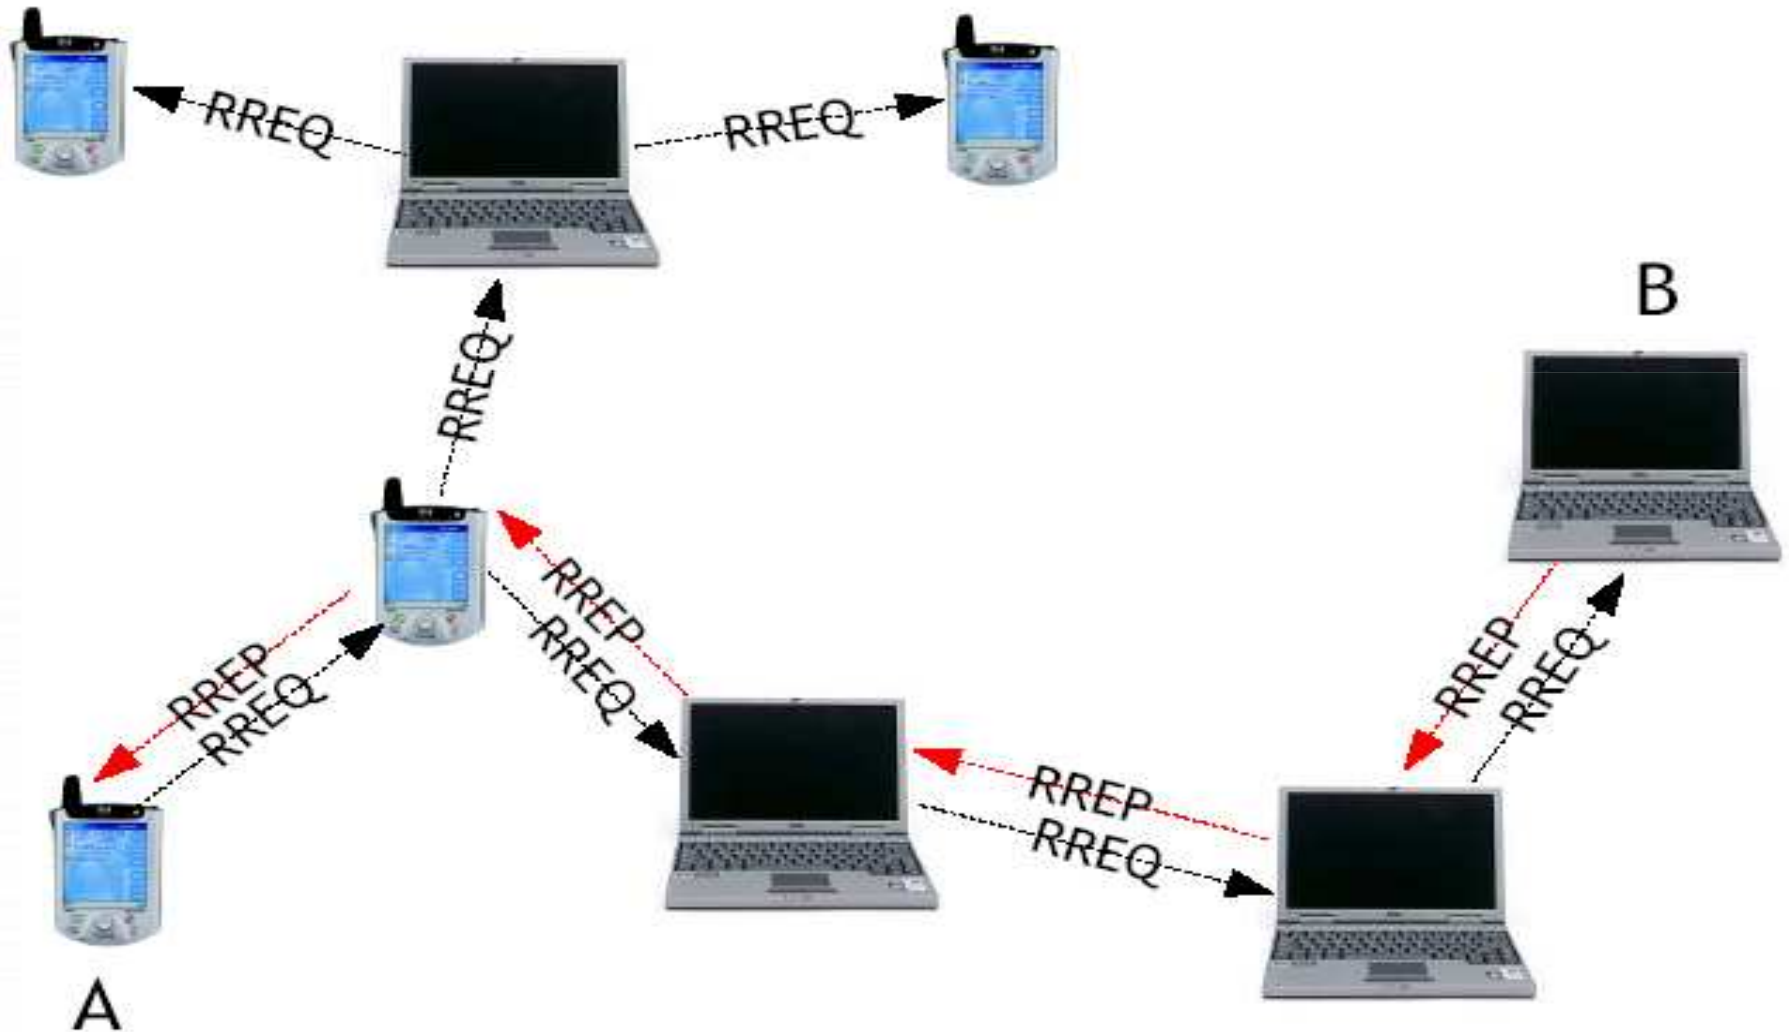

## *AODV - Characteristics*

---

- » Decision to request a route
- » Broadcast of *Route-request*
- » Intermediate nodes get routes to node A
- » *Route-reply* sent in *unicast* by same path
- » Intermediate nodes get also route to node B
- » Routes have *Time-to-live*, in every node
- » Needs symmetric graph

## *Pro-active routing protocols*


---

- ♦ Routes built using continuous control traffic
- ♦ Routes are maintained
  
- ♦ Advantages, disadvantages
  - » Constant control traffic
  - » Routes always available
  
- ♦ Example – OLSR (RFC 3626)
  - » OLSR - Optimized Link-State Routing protocol

## *OLSR – Main functions*

---


- ♦ Detection of links to neighbour nodes
- ♦ Optimized forwarding / flooding (MultiPoint Relaying)

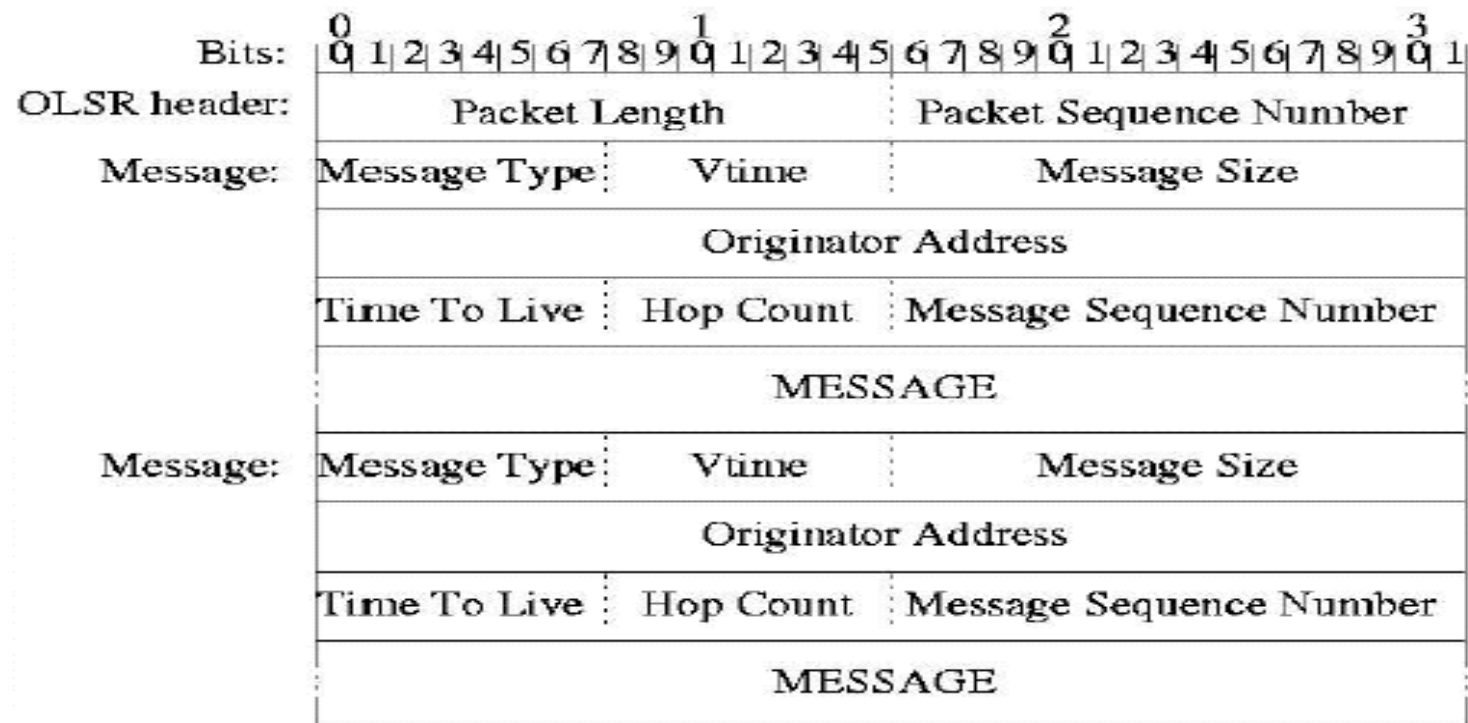



## OLSR – Detecting links to neighbour nodes


- ♦ Using *HELLO* messages
- ♦ All nodes transmit periodically *HELLO* messages
- ♦ *HELLO* messages group neighbour by their state

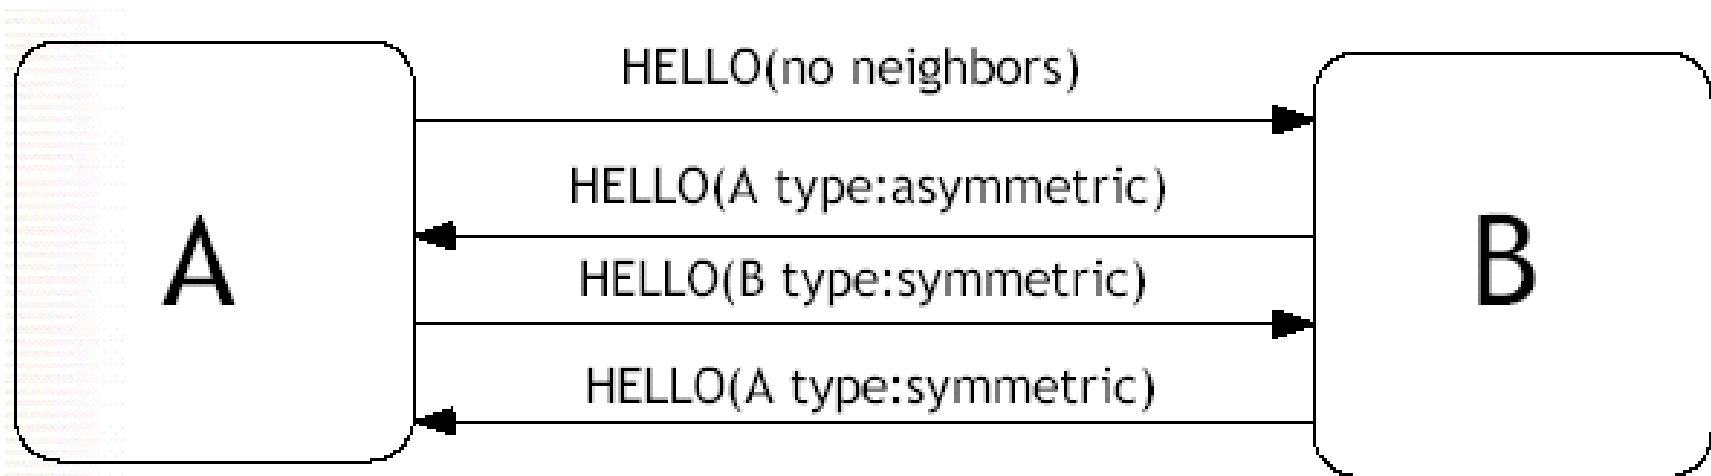

## *OLSR – MultiPoint Relaying (MPR)*

---

- ◆ MultiPoint Relaying (MPR)
  - » Special nodes in the network
  - » Used to
    - Limit number of nodes retransmitting packets
    - Reduce number duplicated retransmissions
- ◆ Each node selects its MPRs, which must
  - » Be at 1 hop distance
  - » Have symmetric links
- ◆ MPR set selected by a node
  - » Must be minimum
  - » Must enable communication with every 2-hop-away nodes
- ◆ Node is MPR if it has been selected by other node

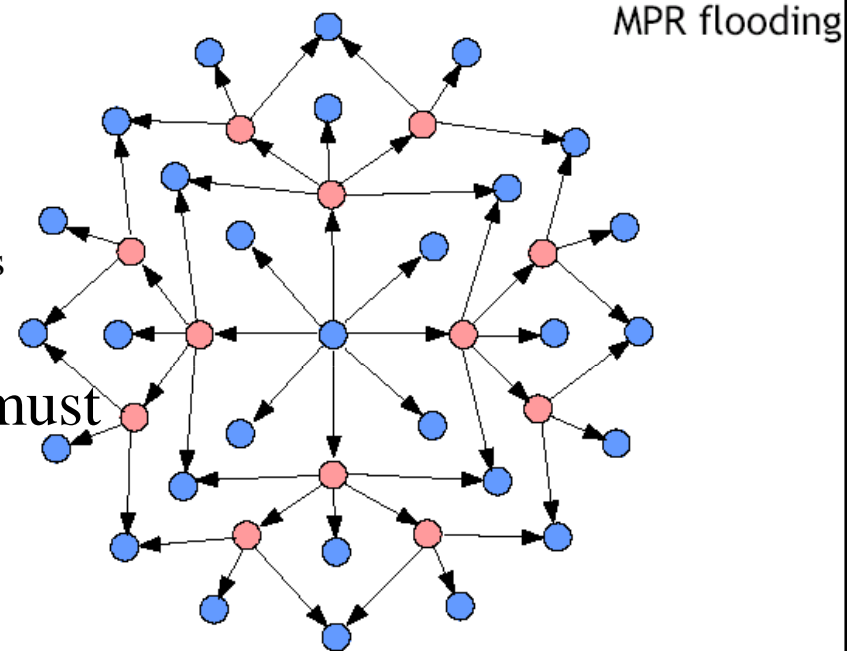

## *OLSR – Link State*


---

- ◆ In wired networks, OSPF
  - » Every node floods the network
  - » With information about its links state
  
- ◆ OLSR does the same, using **2 optimizations**
  - » Only nodes associated to MPR are declared in link state message
    - ➔ Reduced message length
  
  - » Only the MPR nodes send link state messages
    - ➔ Smaller number of nodes sending messages

## *OLSR – Link state, example*

---

- ◆ Messages which declare the links state
  - » “Topology Control Messages”

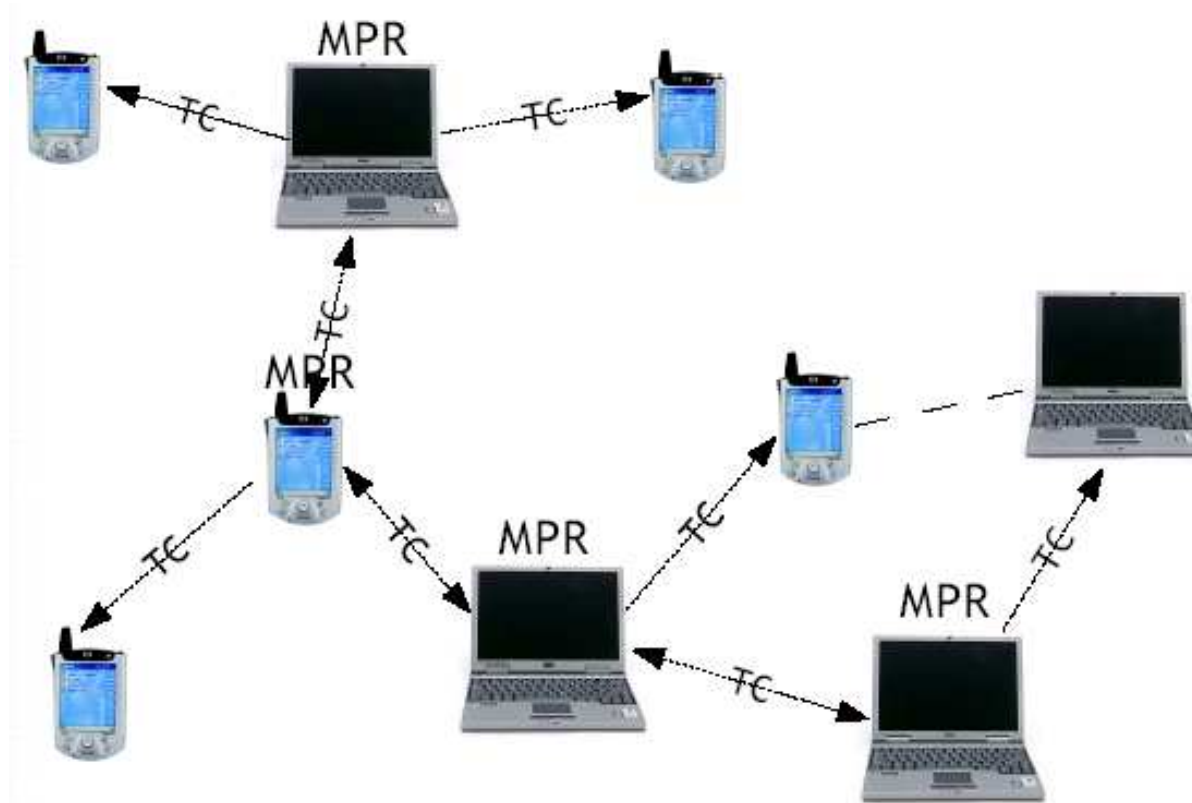

## *The IEEE 802.11 mesh networks*

---

- ♦ *How will the 802.11s Mesh Network work?*

Note: This set of slides reflects the view of a 802.11s *draft* standard.


## *IEEE 802.11s - Main Characteristics*

---

- ♦ Network topology and discovery
- ♦ Inter-working
- ♦ Path Selection and Forwarding
- ♦ MAC Enhancements


## *Elements of a WLAN Mesh Network*

- MP - Mesh Point
  - establishes links with neighbor MPs
- MAP - Mesh AP
  - MP + AP
- MPP - Mesh Portal
- STA – 802.11 station
  - standard 802.11 STA

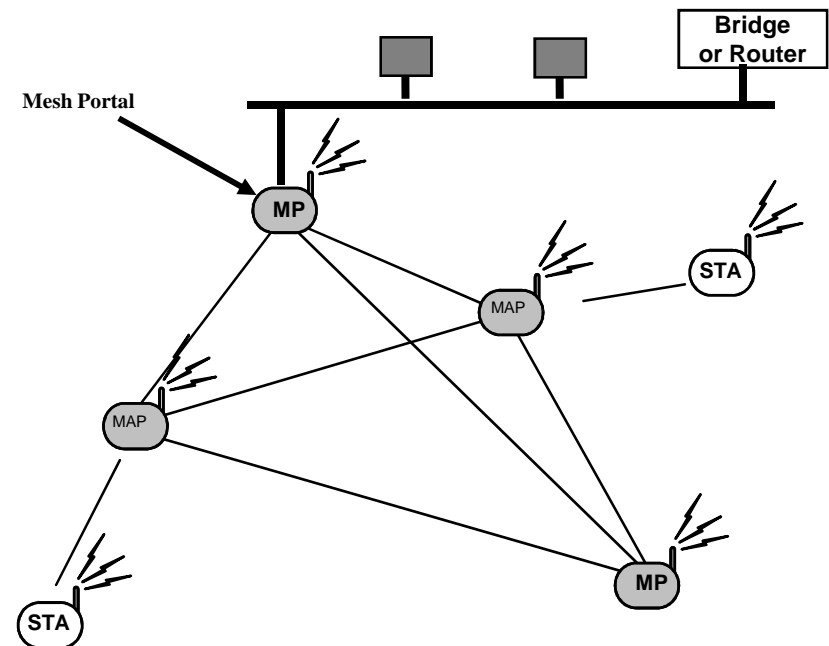



## *L2 Mesh Network - Emulates 802 LAN Segment*

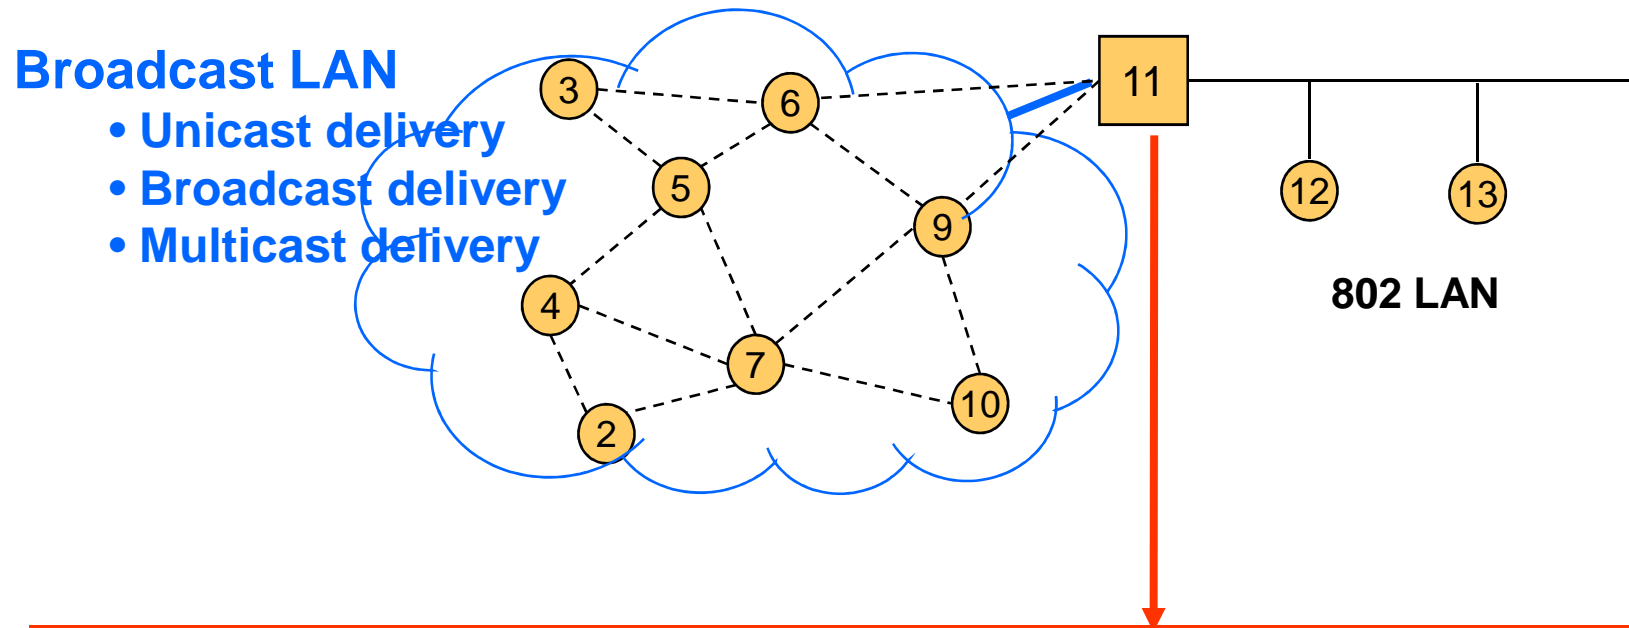


### **Support for connecting an 802.11s mesh to an 802.1D bridged LAN**

- Broadcast LAN (transparent forwarding)
- Learning bridge
- Support for bridge-to-bridge communications: Mesh Portal participates in STP

## *To think about*

---


- ◆ Suppose A sends a frame to B (MAC layer). What MAC addresses are required for the frame transmitted between the two Ethernet switches?
- ◆ And what MAC addresses are required for the frame transmitted between the two MAPs? Why are the 2 cases different?

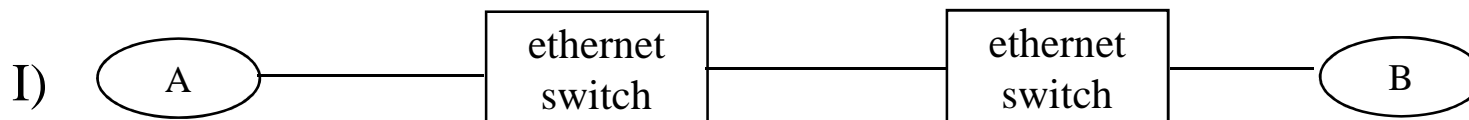

# Mesh Data Frames


## ◆ Data frames

- » based on 802.11 frames - 4 MAC address format
- » extended with: 802.11e QoS header, and new Mesh Control header field

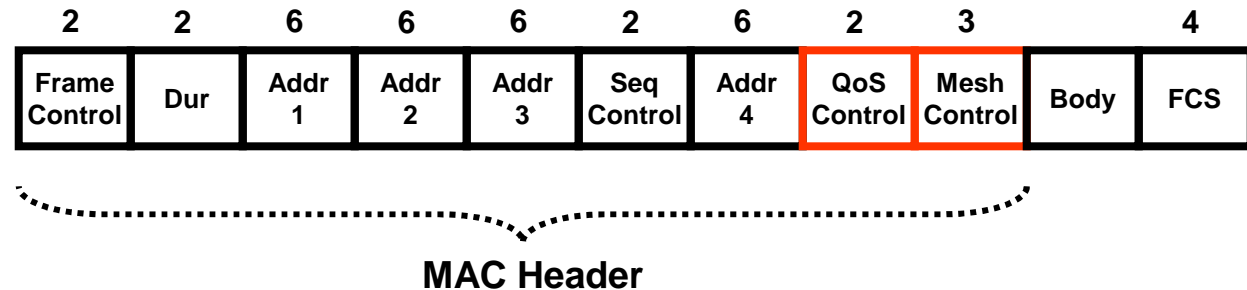

## ◆ Mesh Control Field

- » TTL – eliminates possibility of infinite loops ([recall these are mesh networks!](#))
- » Mesh E2E Seq

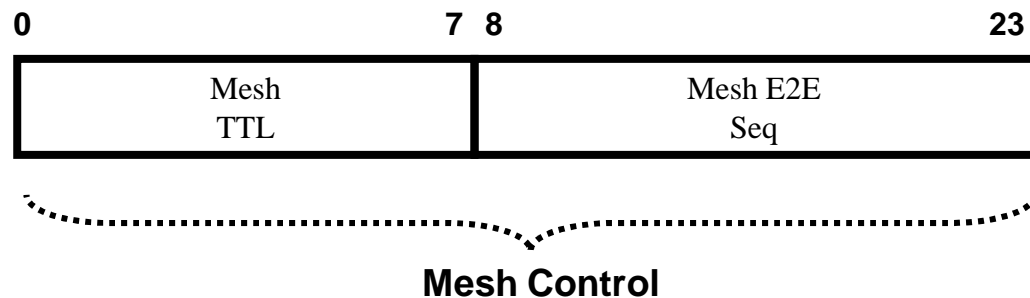


## *Topology Formation*

---

- ◆ Mesh Point discovers candidate neighbors
  - » based on beacons, which contain mesh information
    - WLAN Mesh capabilities
    - Mesh ID
- ◆ Membership in a WLAN Mesh Network
  - » determined by (secure) association with neighbors



# Mesh Association

1. MP **X** discovers Mesh **mesh-A** with profile (*link state, ...*)
2. MP **X** associates / authenticates with neighbors in the mesh, since it can support the Profile
3. MP **X** begins participating in **link state path selection** and **data forwarding** protocol

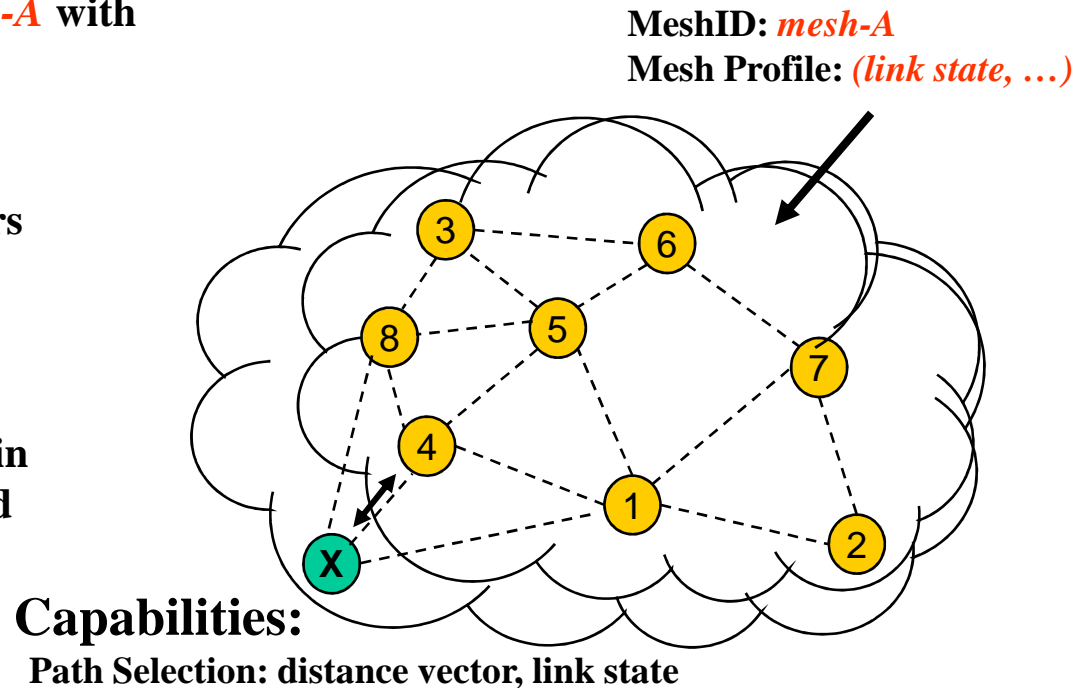

**One active protocol in one mesh**  
**but alternative protocols in different meshes**

## *Interworking - Packet Forwarding*

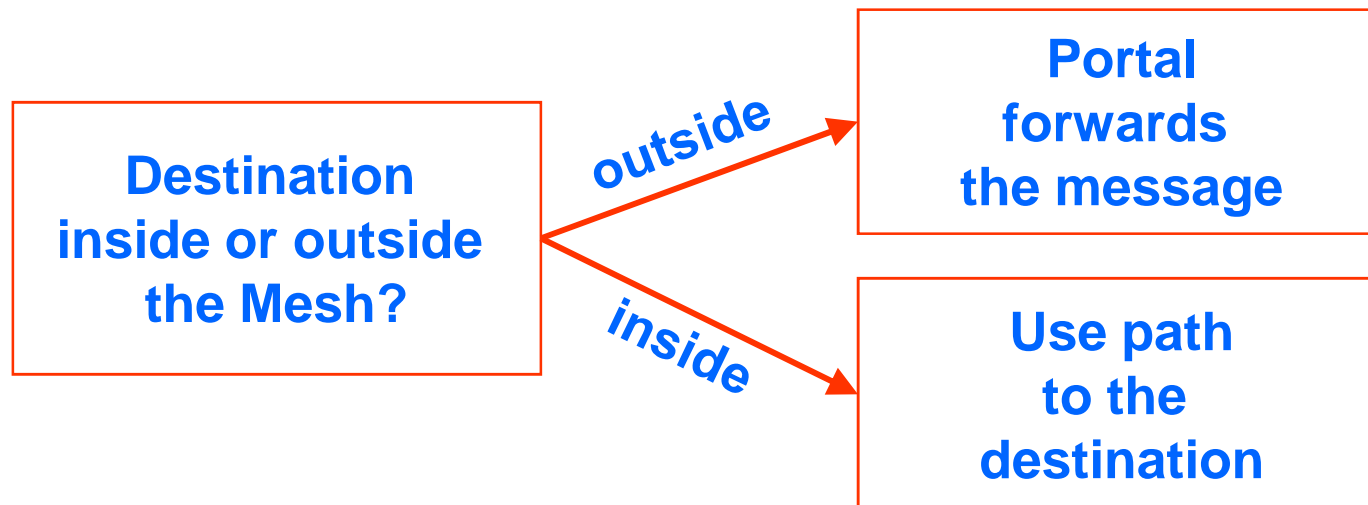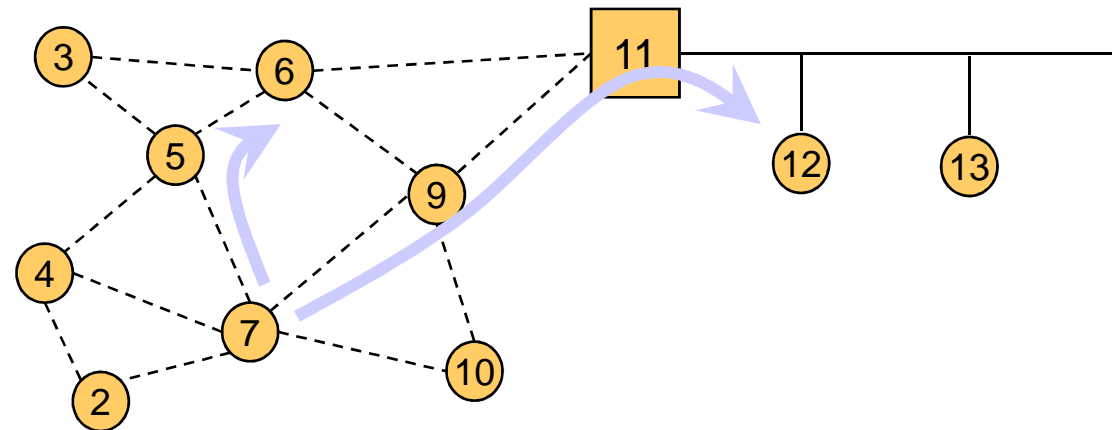

## *Hybrid Wireless Mesh Protocol (HWMP)*

### Combines


- » on-demand route discovery
  - based on AODV
  
- » proactive routing to a mesh portal
  - distance vector routing tree built and maintained rooted at the Portal

## *HWMP Example 1:*

### *No Root, Destination Inside the Mesh*

---

- Communication: MP4  $\rightarrow$  MP9
- MP4
  - checks its forwarding table for an entry to MP9
  - If no entry exists, MP4 sends a broadcast RREQ to discover the best path to MP9
- MP9 replies with unicast RREP
- Data communication begins

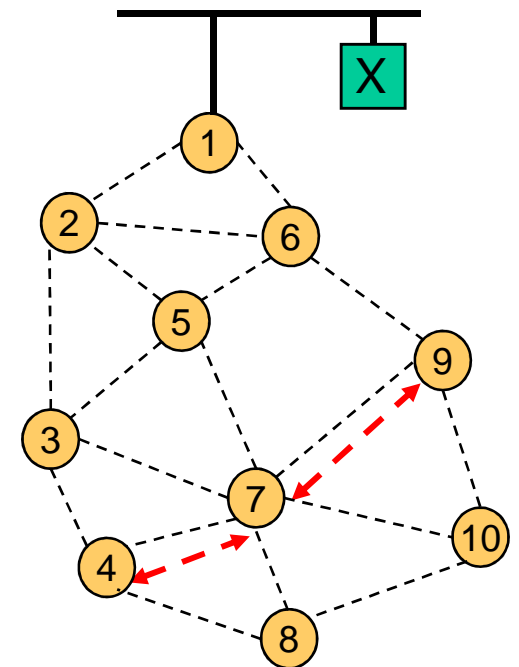

← - - - → On-demand path




## *HWMP Example 3:*

### *No Root, Destination Outside the Mesh*

---

- ◆ Communication: MP4 → X
- ◆ MP4
  - » first checks its forwarding table for an entry to X
  - » If no entry exists, MP4 sends a broadcast RREQ to discover the best path to X
  - » When no RREP received, MP4 assumes X is outside the mesh and sends messages destined to X to Mesh Portals
- ◆ Mesh Portal that knows X may respond with a unicast RREP

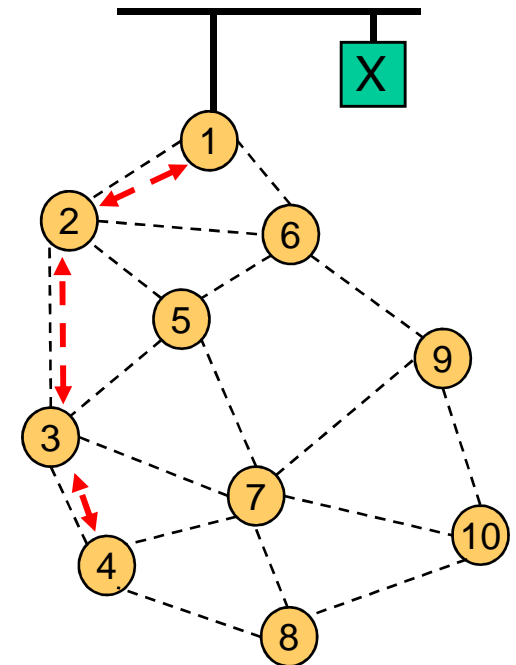


← - - - → On-demand path

## *HWMP Example 2:*

### *Root, Destination Inside the Mesh*

---


- ♦ Communication: MP 4 → MP 9
- ♦ MPs learn Root MP1 through **Root Announcement** messages
- ♦ MP 4 checks its forwarding table for an entry to MP9
- ♦ If no entry exists, MP4 forwards message on the proactive path to Root MP1
- ♦ When MP1 receives the message, it forwards on the proactive path to MP9
- ♦ MP9, receiving the message, may issue a RREQ back to MP 4 to establish a path that is more efficient than the path via Root MP1

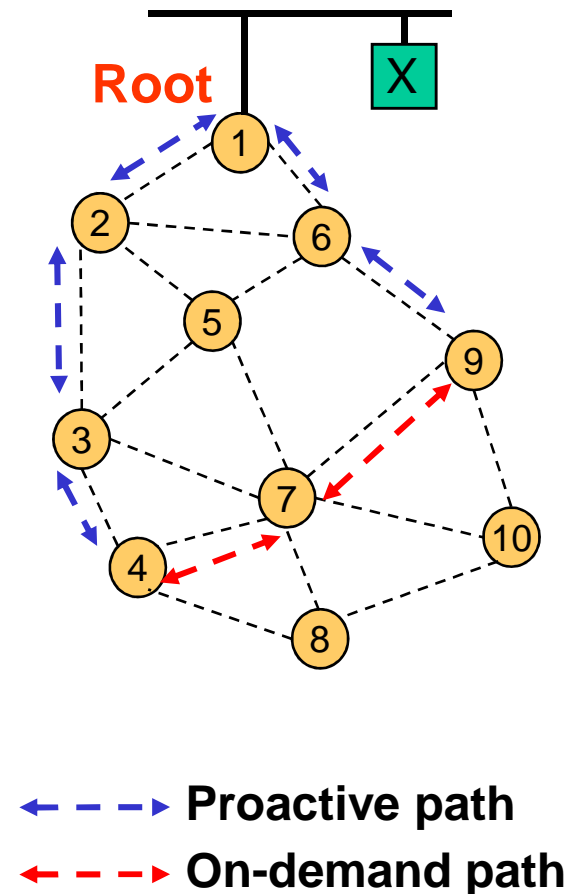

## *HWMP Example 4:* *Root, Destination Outside the Mesh*

---

- ♦ Communication: MP4 → X
- ♦ MPs learn Root MP1 through **Root Announcement** messages
- ♦ If MP4 has no entry for X in its forwarding table, MP 4 may forward the message on the proactive path toward the Root MP1
- ♦ When MP1 receives the message, if it does not have an active forwarding entry to X it may assume the destination is outside the mesh
- ♦ Mesh Portal MP1 forwards messages to other LAN segments

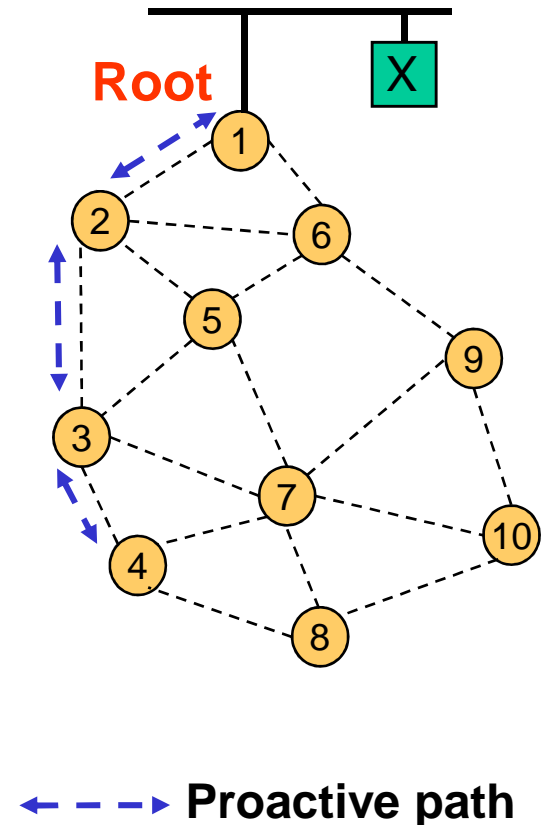

## *Radio Aware OLSR (RA-OLSR)*

---

- ♦ OLSR may be used in alternative to AODV
- ♦ RA-OLSR proactively maintains link-state for routing

## *MAC Enhancements for Mesh*


---

- ◆ Intra-mesh Congestion Control
- ◆ Common Channel Framework (Optional)

## *Need for Congestion Control*

---

- ◆ Mesh characteristics
  - » Heterogeneous link capacities along the path of a flow
  - » Traffic aggregation: Multi-hop flows sharing intermediate links
- ◆ Issues with the 802.11 MAC for mesh
  - » Nodes blindly transmit as many packets as possible, regardless of how many reach the destination
  - » Results in throughput degradation and performance inefficiency

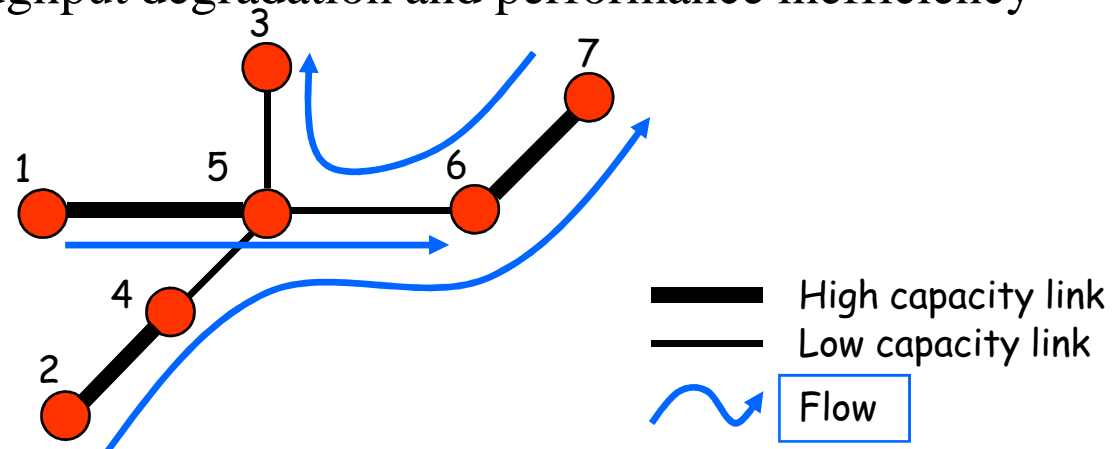



## *Intra-Mesh Congestion Control Mechanisms*

- ◆ Local congestion monitoring (informative)
  - » Each node actively monitors local channel utilization
  - » If congestion detected,  
notifies previous-hop neighbors and/or the neighborhood
- ◆ Congestion control signaling
  - » Congestion Control Request (unicast)
  - » Congestion Control Response (unicast)
  - » Neighborhood Congestion Announcement (broadcast)

# Common Channel

## ♦ Common channel

- » Unified Channel on which MPs jointly operate
- » Using RTX, the transmitter suggests a destination channel
- » Receiver accepts/declines the suggested channel using CTX
- » The transmitter and receiver switch to the destination channel
- » Data is transmitted
- » Then they switch back

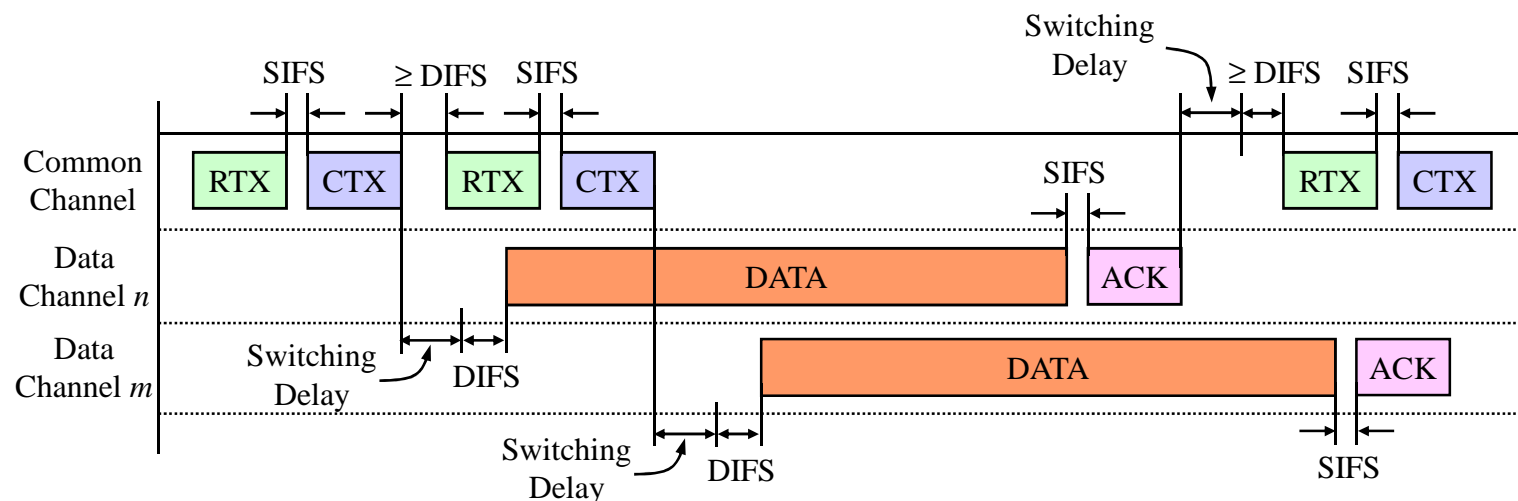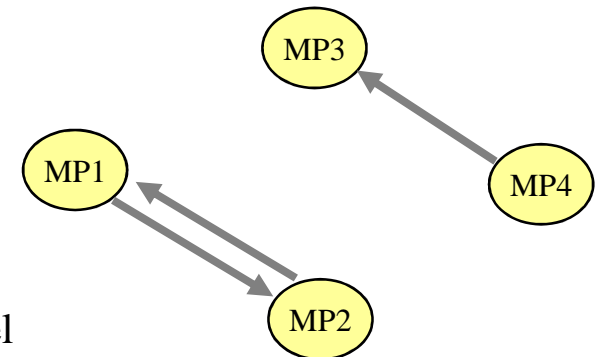




## *Control Frames*

---

### ◆ Request to Switch (RTX) Frame

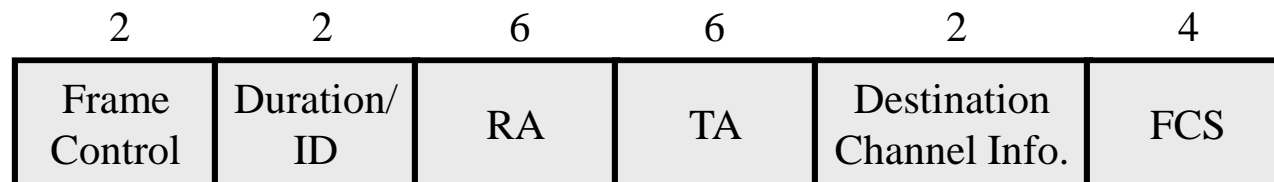

### ◆ Clear to Switch (CTX) Frame

